

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number  
**WO 2005/063429 A1**

(51) International Patent Classification<sup>7</sup>: **B23D 61/02**,  
B28D 1/04

[SE/SE]; Kvarnstensvägen 29, S-433 70 Sävedalen (SE).  
**KARLSSON, Fredrik** [SE/SE]; Ernst Torulfsgatan 15A,  
S-416 73 Göteborg (SE).

(21) International Application Number:  
PCT/SE2004/002057

(74) Agent: **ANDERSSON, Lars**; AB Electrolux, Husqvarna  
AB, S-433 81 Jönsered (SE).

(22) International Filing Date:  
29 December 2004 (29.12.2004)

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0303561-5 30 December 2003 (30.12.2003) SE

(71) Applicant (*for all designated States except US*): **AK-  
TIEBOLAGET ELECTROLUX** [SE/SE]; S-105 45  
Stockholm (SE).


(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **DONNERDAL, Ove**

[Continued on next page]

(54) Title: A SAW BLADE FOR A HANDHELD WORKING TOOL

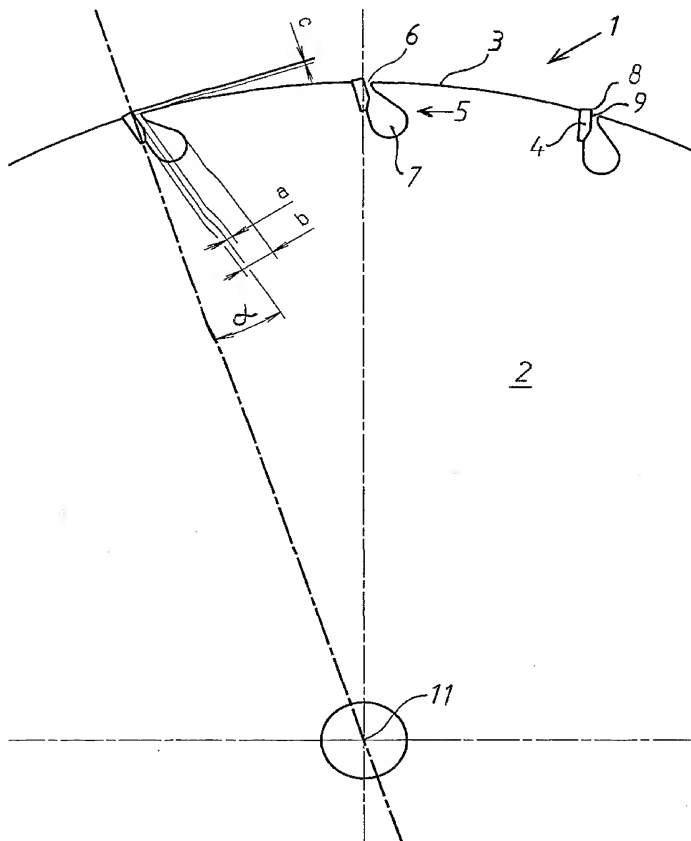

(57) Abstract: A saw blade (1) intended for a handheld working tool, and the saw blade comprises a blade body (2) having an outer periphery (3) with a number of teeth (4) arranged by fastening a separate part or through a local addition of a surface lining material. The teeth occupy less than 0,2 times of the periphery (3) of the saw blade and in that rotation-wise in front of at least a tooth (4) there is a notch (5) that runs towards the center of the saw blade and this notch has a narrow opening (6) at the periphery and preferably widens considerably inside the opening to a widened part (7) and the widened part has a width (b) that is greater than 1,3 times the width (a) of the opening. Rotation-wise in front of the narrow opening (6) the outer periphery (3) of the blade body (2) has a maximum radius essentially from a center (11) of the saw blade and this maximum radius is maintained during at least 55 % in succession, and preferably during at least 70 %, of a peripheral distance from the narrow opening to the start of the next tooth and the tooth (4) has an edge (8) at its outer foremost end, i.e. first in the direction of rotation and a front side (9) of the tooth (4) at the edge (8) forms a negative rake angle  $\alpha$  from the edge and to the center (11) of the saw blade, and the angle  $\alpha$  is greater than 0 degrees and preferably greater than 8 degrees but smaller than 30 degrees.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,  
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*